

LANDA[®]
PRESSURE WASHERS

Since 1969

North America's **LARGEST** Manufacturer
of Industrial **PRESSURE WASHERS**

PG

Portable, Belt-Drive, Gasoline-Powered,
Cold Water Pressure Washer

- Up to 4.7 GPM, 4000 PSI
- Belt-Drive Landa Pump with 7-Year Warranty
- Reliable Honda or Vanguard Engine
- Lots of Safety Features



■ Rugged **High-Pressure Landa Pump**, with three ceramic plungers, forged brass head and seven-year warranty, is connected to the engine by a belt-drive assembly that features cast-iron bushing **Pulleys** and two notched "V" cogged belts, which provide a cooler operation and longer life; also two-bolt adjustment makes it easy to adjust the belt tension.

■ Heavy-duty Gasoline-Powered **Honda or Vanguard Engine**, 9 to 20 HP, with low-oil alert and some with electric start.

■ Helpful **Tri-Lingual Labels** with operating instructions in English, Spanish and French for added liability protection and operator convenience.

■ Spring-loaded **Trigger Gun** with stainless steel, **Variable Pressure Wand** for low pressure detergent application (except 2000 and 2500 PSI models use standard wand).

■ **Hose/Gun Hanger** for ease in storing hose and gun when not in use.

■ Block-mounted, top quality **Unloader** diverts water flow when trigger gun is shut off and keeps bypass water cooler.

All Models
Certified to the
UL-1776
SAFETY STANDARDS
OSHA Compliant

■ Many **Safety Features**, including a thermal pump protector to prevent the build up of excessive heat and OSHA approved belt guard.

■ 50 ft. of steel-wire braid **High Pressure Hose** rated for up to 4000 PSI with 24-inch **Hose Guard** for burst protection and **Swivel Crimp Fitting** for ease in attaching trigger gun to hose.

■ Two spring-loaded **Rubber Pad Feet** absorb vibration for long life and to keep the unit from "walking."

■ Rugged 10-gauge steel **Chassis** is protected with all-weather-resistant epoxy powder coat paint.


■ Four quick-couple **Nozzles** are made of hardened stainless steel and color-coded for easy selection of spray pattern: 0°, 15°, 25°, 40°

■ 1 1/4" Chrome-plated **Handles** on front and back for convenience in vehicle loading and unloading.

■ Easy-to-attach **Detergent Injector** for easy application of soap.

■ Two-ply, tubed **Pneumatic Tires** make for easy maneuvering in any terrain.

■ **Oil Drain Hose** for convenience in changing oil.

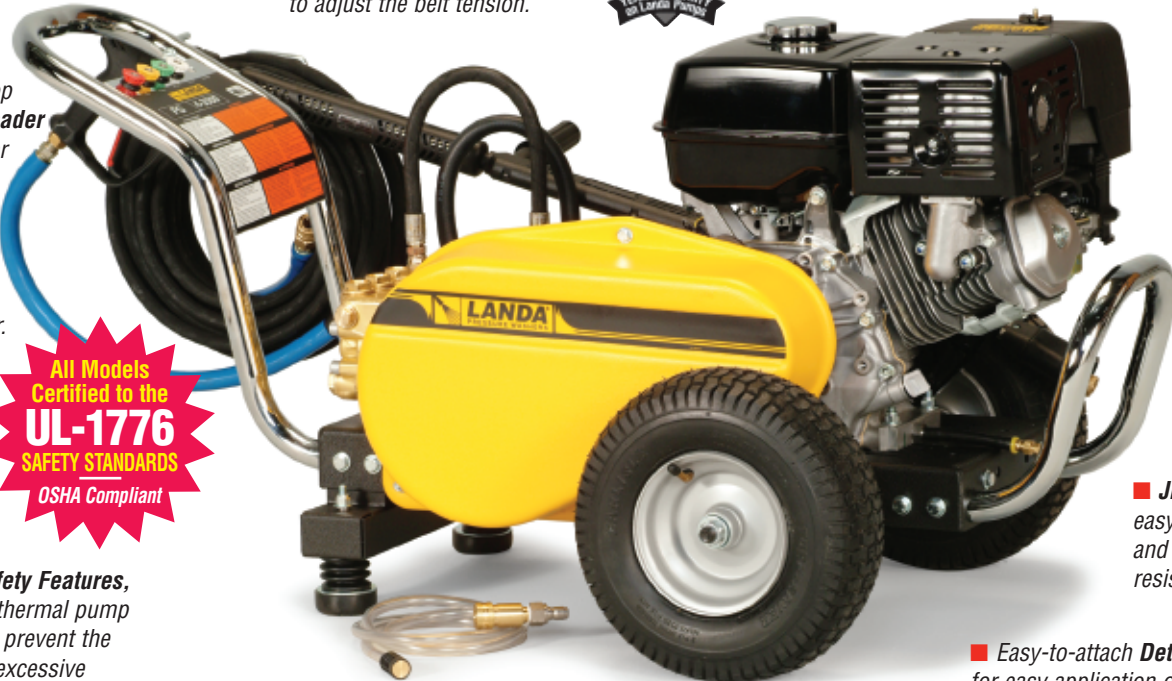

■ **E-Z Start Valve** makes for resistance-free pull starting of the engine.

■ **JIC Fittings** are easy to service and corrosion-resistant.



www.landa.com



Since 1969

North America's **LARGEST** Manufacturer
of Industrial **PRESSURE WASHERS**

PG

*Portable, Belt-Drive, Gasoline-Powered,
Cold Water Pressure Washer*

- Up to 4.7 GPM, 4000 PSI
- Belt-Drive Landa Pump with 7-Year Warranty
- Reliable Honda or Vanguard Engine
- Lots of Safety Features



WHY CHOOSE LANDA'S PG

The PG is Landa's portable, belt-drive, cold water pressure washer line offering seven models with cleaning power of up to 4000 PSI.

QUALITY: Only the highest quality components are used on the PG, including the tri-plunger Landa high-pressure pump with 7-year warranty, Honda or Vanguard engine with 2-year warranty, durable steel frame with welded seams, and stainless steel point-and-shoot wand for cleaning effectiveness. In addition to being certified to the rigid UL-1776 safety standards, the PG has a totally enclosed, OSHA-compliant belt guard, a 24-inch hose guard for burst protection and tri-lingual operating instructions for owner liability assurance. Also, the PG is assembled in a factory certified to the internationally recognized ISO-9001 quality manufacturing standards.

CONVENIENCE: There are a number of features that make the PG especially popular with users who need a powerful, outdoor pressure washer that cleans fast. For instance, there are chrome-plated handles on both front and back for easy vehicle loading. The two leak-free, tubed pneumatic tires make for easy maneuvering in any terrain and there are two shock-absorbing spring-loaded rubber feet to keep the PG from "walking" while in operation. And the E-Z start valve allows for resistance-free pull starting of the engine.

PG Specifications

Part No.	GPM	PSI	Engine HP	Start	Fuel Tank	Pump RPM	L x W x H	SHIP WT.
PG4-20324	4.2	2000	Honda 9	Recoil	1.6 Gal.	1300	40" x 27" x 25"	230 lbs.
PG4-25324	4.0	2500	Honda 11	Recoil	1.9 Gal.	1250	40" x 27" x 25"	240 lbs.
PG4-30324	3.5	3000	Honda 11	Recoil	1.9 Gal.	1160	40" x 27" x 25"	250 lbs.
PG4-35324	3.8	3500	Honda 13	Recoil	1.9 Gal.	1185	48" x 27" x 30"	250 lbs.
PG4-40324E	4.0	4000	Honda 20	Electric*	6.0 Gal.	1090	48" x 27" x 30"	275 lbs.
PG5-35224E	4.7	3500	Vanguard 16	Electric*	2.3 Gal.	1185	48" x 27" x 30"	300 lbs.
PG5-35324E	4.7	3500	Honda 20	Electric*	6.0 Gal.	1185	48" x 27" x 30"	300 lbs.

*Electric Start models require 12V U-1 size battery; battery not included.



Distributed by:

OPTIONS:

Part No.	Description
30-5177	Stainless Steel Frame (for models up to 11 HP)
30-5178	Stainless Steel Frame (for 13 HP models)
30-5179	Stainless Steel Frame (for 16 & 20 HP models)

www.landa.com