



LANDA[®]
PRESSURE WASHERS


Since 1969

North America's **LARGEST** Manufacturer
of Industrial **PRESSURE WASHERS**

SEHW

*Self-Contained, Electric-Powered,
Diesel-Heated, Hot Water Pressure Washer*

- 5.2 GPM, 3500 PSI
- Industrial-Grade, 15 HP Baldor Motor
- Belt-Drive Landa Pump with 5-Year Warranty
- Sch. 80 Heating Coil

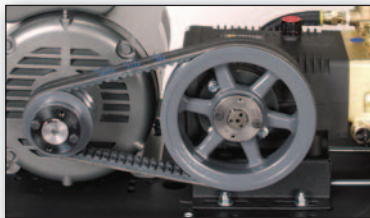

▲ Industrial-strength **Motor** and cast-iron, bushing **Pulleys** use a convenient 2-bolt pulley adjustment for easy maintenance and longer life; 2 notched "V" cogged belts, which operate cooler, connect the motor to the rugged **High-Pressure Landa Pump** with three ceramic plungers and forged brass head with five-year warranty.

■ High-efficiency **Burner** is shielded by overhanging cover and features a **Fuel-Water Separator** for fuel pump protection.

■ Industrial-strength **Electric Motor** with multiple voltage options and thermal overload protection.

■ Rust-free **Float Tank** with stainless steel inlet filter provides backflow protection.

■ Four quick-couple **Nozzles** are made of hardened stainless steel and mounted for ready access.

■ Motor and pump are mounted on a vibration-isolated **Power Platform** to minimize frame stress.

■ Extra-durable **Heating Coil** made of leak-free, cold-rolled, Schedule 80 steel pipe with five-year warranty.

■ Attractive brushed stainless steel upper and lower **Coil Wraps** provide a lifetime of rust-free protection.

■ Rugged **Steel Frame**, made of 1 1/4-inch square tubing, provides protection to key components; further protected by epoxy powder coat finish.

■ Helpful **Tri-Lingual Labels** with operating instructions in English, Spanish and French for owner and operator protection.

■ Conveniently located **Control Panel** with magnetic starter; anti-siphon detergent valve, which locks out air for precise soap metering; adjustable thermostat; hour meter; and burner monitoring light.

■ 50 ft. of double steel-wire braid **High Pressure Hose** with 24-inch guard for burst protection and rated for up to 5800 PSI.

■ Insulated, fatigue-free **Trigger Gun** with stainless steel, dual-lance **Variable Pressure Wand** make for easy cleaning and adjusting the pressure while washing.

■ Rust-free, 10 gal. **Fuel Tank** with elevated fuel line to prevent dirt and debris from reaching burner.

■ Many **Safety Features**, including a rupture disk, thermal pump protector and time delay shutdown to prevent unattended operation.

All Models
Certified to the
UL-1776
SAFETY STANDARDS
OSHA Compliant

ISO
9001
REGISTERED



www.landa.com



LANDA[®]
PRESSURE WASHERS

Since 1969

North America's **LARGEST** Manufacturer
of Industrial **PRESSURE WASHERS**

SEHW

*Self-Contained, Electric-Powered,
Diesel-Heated, Hot Water Pressure Washer*

- 5.2 GPM, 3500 PSI
- Industrial-Grade,
15 HP Baldor Motor
- Belt-Drive Landa Pump
with 5-Year Warranty
- Sch. 80 Heating Coil



The SEHW is a top-of-the-line model for hot water pressure washing outdoors



WHY CHOOSE LANDA'S SEHW

The most rugged electric-powered hot water pressure washer in a skid frame is the SEHW—an acronym for Skid Electric Hot Water. It features a top-of-the-line, belt-drive, tri-plunger high-pressure Landa Pump with 5-year warranty and low RPM for extended life. Along with the other *LANDA* models that feature an easy-access, energy-efficient horizontal coil, the SEHW offers these premier benefits:

QUALITY: Packed with *LANDA* quality throughout, the SEHW is heated by diesel or fuel oil using a high-efficiency Beckett burner. Other quality features include: Heating coil made of 1/2-inch Schedule 80 steel pipe; a 1 1/4-inch steel frame; a detergent metering valve for convenience in adjusting the flow of the soap; and a power platform for the motor and pump that is mounted on vibration isolators to minimize stress on the frame and to increase the equipment life.

PORTABILITY: The SEHW, with its convenient forklift guides, is easy to maneuver as well as load or unload. A wheel kit featuring four tubed pneumatic tires further enhances the SEHW's portability.

SAFETY: Certified to the rigid UL-1776 safety standards, the SEHW also has many features that make it extremely safe, including motor thermal overload protection, rupture disk attached to the heating coil, thermal pump protector, flow-activated fuel shut-off switch, time-delay shutdown, 24-inch hose guard for burst protection, and magnetic starter. The OSHA-compliant belt guard is totally enclosed for operator safety.

SEHW Specifications

Part No.	GPM	PSI	Motor HP	Electrical	Amps	Pump RPM	BTU / Hr	L x W x H	SHIP WT.
SEHW6-35024B	5.2	3500	15	230V 3ph	40	1340	463,000	43" x 31" x 43"	626 lbs.
SEHW6-35024C	5.2	3500	15	460V 3ph	22	1340	463,000	43" x 31" x 43"	626 lbs.
SEHW6-35024H	5.2	3500	15	208V 3ph	42	1340	463,000	43" x 31" x 43"	626 lbs.



Distributed by:

OPTIONS:

Part No.	Description
30-5173	Stainless Steel Skid Cage and Platform
4-03175	Wheel Kit, Including 4 Tubed Pneumatic Tires
30-5022	E-Zee Hose Reel Mounting Kit
4-02755030	E-Zee Hose Reel
30-478	Automatic Start / Stop

www.landa.com